IS40P

PRESENCE SENSOR WITH VIRTUAL LOOP FUNCTIONALITY

VIDEO

Watch the product video

TECHNOLOGY

CERTIFICATIONS

DESCRIPTION

BEA's **IS40P** is an infrared presence sensor designed for use in industrial applications. This sensor utilizes 40 active infrared spots for reliable presence detection.

The **IS40P** is ideal for use on automatic industrial doors, vehicles gates / barriers, loading docks and other applications where presence detection is required. It can be mounted from 8 feet to 16 feet to fit most industrial applications.

Its rugged IP65 rated enclosure can withstand harsh environments and is capable of preventing damage caused by dust, rain and hose-directed water.

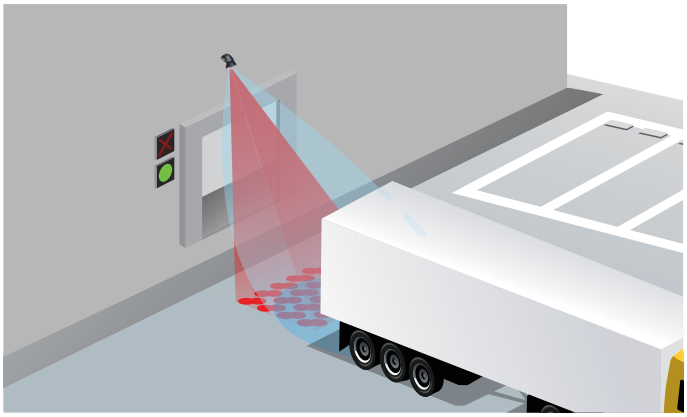

Adjustable Learn Time

Nine unique infrared patterns capable of highly flexible presence detection in any industrial environment

Reduce False Detections

Six modes of detection filtering are available for microwave immunity, as well as pedestrian and parallel traffic rejection

Programmable Via Remote

Remote control programming enables user to quickly and safely make changes from the ground (sold separately)

Easy To Program

Adjustable infrared immunity modes mitigate environmental disturbances such as subtle door vibrations, light, sun, rain and snow

Adjustable Learn Time

Nine unique infrared patterns capable of highly flexible presence detection in any industrial environment

APPLICATIONS

Large Presence Detection Field



Pedestrian Cross Traffic Rejection



Warehouse Traffic Signaling



Presence Detection For Parking



Vehicle & Gate Applications

TECHNICAL SPECIFICATIONS

Technology	Active Infrared
Detection Mode	Presence
Mains Frequency	50 – 60 Hz
Power Consumption	< 3.5 W
Output	2 Relays (free of potential change-over contact)
Max. Contact Voltage	42 VAC / VDC
Max. Contact Current	1 A (resistive)
Max. Switching Power	30 W (DC) / 48 VA (AC)
Supply Voltage	12 – 24 VAC; ±10% 12 – 24 VDC; 10% / -3%
Temperature Range	-22 – 140 °F
Tilt Angle	15 – 45°
Transmitter Frequency / Wavelength	875 nm
Transmitter Power Density	< 250 mW / m²
Detection Field	10′ × 10′ @ max. mounting height of 16′ (*emitting spots)
Output Hold Time	0.5 s
Min. Detection Speed	0 in / s to activate detection
Reaction Time	250 ms
Mounting Height	8 – 16′
Humidity	0 – 95% non-condensing
Weight	14 oz
Dimensions	3 4/5″ (W) × 4″ (H) × 5″ (D)
Material	ABS & Polycarbonate
Cable Length	32′
Degree of Protection	IP65
Norm Conformity	EMC: 2004 / 108 / EC R&TTE: 1999 / 5 / EC

*Zone detected by SPOTFINDER, i.e. slightly larger than actual detection field

PRODUCT SERIES

10IS40P
Presence sensor



10INDBRACKET
Industrial mounting bracket

10MINIBRACKET
Short adjustable mounting bracket

10WBA
Universal mounting bracket arm

10WBAMOUNT
Universal mounting bracket plate

10SPOTFINDER
Infrared spotfinder

10REMOTE
BEA universal remote control

DISCLAIMER Information is supplied upon the condition that the persons receiving it will make their own determination as to its suitability for their purposes prior to use. In no event will BEA be responsible for damages of any nature whatsoever resulting from the use of or reliance upon information from this document or the products to which the information refers. BEA has the right without liability to change descriptions and specifications at any time.

BEA AMERICAS / RIDC Park West / 100 Enterprise Drive / Pittsburgh, PA
T 1-800-523-2462 / **F** 1-888-523-2462 / **E** info-us@BEAsensors.com

A **Halma** company

79.0113.15 • 20220709